



The
**Patent
Office**

09/806007
PCT/GB 99/03090

17 SEPTEMBER 1999

INVESTOR IN PEOPLE

GB 99/3090

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 22 OCT 1999

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

Dated

11 OCT 1999

BEST AVAILABLE COPY

The
Patent
Office

THE PATENT OFFICE
A

02 OCT 1993

RECEIVED BY POST

1/77
98 5394131- 001891
F0 77700 0.00 - 9821359

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

1WP0026/GBD

2. Patent application number

(The Patent Office will fill in this part)

9821359.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The Secretary of State for Defence
Whitehall
London
SW1A 2HB

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

GB

07301849001

4. Title of the invention

IMPROVED PHOTOMULTIPLIER TUBE CIRCUIT

5. Name of your agent (if you have one)

STEPHEN SKELTON

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

D/IPR
POPLAR 2
MOD ABBEY WOOD # 19
BRISTOL
BS34 8JH

Patents ADP number (if you know it)

07311137001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number or earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right if to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body. See note (d))

Patents Form 1/77

Enter the number of sheets for each of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 6
Claim(s) 2 ✓ BSH
Abstract 1
Drawing(s) 1 + 1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I / We request the grant of a patent on the basis of this application.

S R SKELTON

Signature

SR SKELTON

Date 01/10/98

12. Name and daytime telephone number of person to contact in the United Kingdom

KAREN

LO SCIUTO 0117 9132863

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have attached 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

BEST AVAILABLE COPY

Patents Form 1/77

Improved Photomultiplier Tube Circuit

The present invention relates to an improved circuit for charging and controlling a photomultiplier tube (PMT) and in particular to a circuit used to enable a monitoring device to gain BASEEFA
 5 (British Approval Services for Electrical Equipment for use in Flammable Atmospheres) certification, meaning that it is designated safe for use in an explosive environment.

Known PMTs comprise a photocathode, a plurality of multiplication dynodes having an associated voltage divider network and an anode.
 10 The dynodes of the PMT require a progressively higher voltage to ensure the transmission of secondary electrons through the multiplier section of the tube. Usually the voltage supply is provided by a resistive voltage divider network. A stabilised high voltage power supply is therefore required. To prevent excessive
 15 variations in the dynode voltages, the current through the voltage divider network should be high compared with the electrode currents themselves. A minimum value of at least 100 times the maximum average anode current is required. Typically, the PMT has ten dynode stages which are supplied with the particular voltage
 20 necessary to obtain the required overall gain.

Alternatively the dynode stages can be supplied by a Cockcroft Walton arrangement which is known to be an efficient means for charging the dynodes. Such an arrangement has a capacitor circuit associated with each of the dynode stages. The capacitor circuit
 25 stores the necessary charge to maintain the voltage required at each of the dynode stages to ensure linearity of response for the largest pulse events likely. Such an arrangement provides a low current supply to the dynodes which helps to reduce the power consumption of the circuit.

30 The Oscillator which supplies the HV to the circuit provides the majority of the losses in such a circuit and as such any reduction in the time for which the Oscillator is required to be on will provide the best return as far as power efficiency is concerned.

Furthermore, known PMTs are prone to damage if they are exposed to
 35 light, for example when the screen on a monitor is punctured. This

is due to the amplification of the input signal by the multiplying dynodes which overloads the PMT by stripping the coating from the electrodes by secondary electron emission. This "stripping" effect occurs during normal operation of the PMT although somewhat slower and controlled, giving a finite life to any PMT.

In order to improve the power efficiency of the PMT / HV circuitry the inventor has found that the oscillator does not require to provide a continuous supply and can be switched on and off without effecting the signal produced by the PMT. By sampling the voltage on one of the dynode stages the oscillator can be controlled such that when the voltage on a dynode stage drops below a predetermined level the oscillator will be switched on thus restoring the required voltage. When the voltage is back up to the required level the oscillator can be switched off.

It is an aim of the present invention to provide a PMT circuit which reduces the power consumption of the circuit and additionally meets the BASEEFA requirements.

Accordingly, the present invention provides a photomultiplier tube circuit comprising a photomultiplier tube having a plurality of dynodes, charging circuitry for providing charge to the plurality of dynodes and an oscillator for providing a high voltage supply to the charging circuitry characterised in that the photomultiplier tube circuit further comprise means for sampling the voltage of at least one of the dynodes and a switching means for switching the oscillator on and off with respect to the at least one dynode voltage sampled.

In the PMT and associated HV circuitry according to the invention, the preferred / enhanced operating conditions for a given voltage is determined. Each dynode stage can then be supplied with the optimum voltage by conventional charging circuitry or preferably by using a Cockcroft Walton arrangement. By maintaining each dynode at the optimum voltage, space charge effects and non-linearity are reduced. The number of dynode stages used determines the overall gain which will be achieved. The overall gain is kept to a minimum consistent with signal to noise requirements, keeping peak and average currents low and extending PMT life. Any unused

stages on a PMT can be linked to the anode. The system provides a low impedance HV supply for each dynode, as required, providing just sufficient charge to ensure linearity of response for the largest pulse events likely.

- 5 The amount of charge is closely controlled to increase the power efficiency of the circuit and the switching means is configured to switch the oscillator on and off in response to the dynode voltage sampled so as to maintain the required operating conditions.

10 Advantageously the switching means can be in the form of a micro-controller and can usefully be configured so as to determine the length of time the oscillator is switched on for in order to maintain the required operating conditions. This 'on' time period can be used to determine the exposure condition of the PMT and enable the switching means to prevent dynode, anode or photo-

15 cathode damage (such as "stripping"). It can also reduce power wastage due to currents caused by exposure conditions outside the normal operating range of the equipment, such as excessive light conditions caused by foil / window damage etc. by controlling the maximum length of time the oscillator is switched on. A short 'on'

20 time, e.g. less than 10ms, will be indicative of normal working conditions and a longer 'on' time will be indicative of an overload condition (too many counts per second). An overload condition will result in maximum 'on' times, e.g. times of 10ms, being required.

- 25 Alternatively the oscillator can be controlled such that the oscillator is switched on at a regular interval, for example every 100ms, for a set maximum time period, for example 10ms. If within the 10ms the voltage on the dynode stage reaches the required level the oscillator will be switched off, for example after only
- 30 6ms.

When an overload condition is detected this can be indicated on the display or otherwise.

Time delays can also be arranged within the oscillator's switching means. These time delays can be arranged such that whilst an

35 overload condition is indicated the time delay between switching

on the oscillator or trying to restart the circuit is gradually increased until the overload condition is removed. These time delays can help protect the photomultiplier tube from the overload conditions thus, for example, preventing 'stripping' of the dynodes if the window is pierced and also allowing for the routine replacement of the window. These delays will also reduce power consumption resulting from the overload condition.

In addition to the advantage of power efficiency and exposure condition detection the above reduces the noise generated in the system whilst the oscillator is off, enabling more accurate readings from the PMT.

The photomultiplier tube circuit according to this invention can be used in any application requiring use of a photomultiplier tube however the circuit according to the present invention has been optimised for use in a radiation monitor. In particular it has been optimised for use in a portable radiation monitor which requires to meet the BASEEFA criteria and which needs no on/off switch, the power efficiency of the circuits resulting in the batteries only requiring replacement annually during planned preventative maintenance and calibration activities, as required under the Ionising Radiation Regulations, 1985.

According to a second aspect of the present invention there is provided a method of controlling the charging of a photomultiplier tube having a plurality of dynodes using a charging means comprising the cycle of:

i/ charging the dynodes to a predetermined voltage;

ii/ switching off the charging means;

iii/ sampling at least one of the dynodes to determine its voltage;

iv/ switching on the charging means when the sampled dynode voltage drops below a predetermined voltage

Alternatively there is provided a method of controlling the charging of a photomultiplier tube having a plurality of dynodes using a charging means comprising the cycle of:

- 5 i/ switching on the charging means for a predetermined maximum period of time;
- ii/ during the predetermined maximum period of time sampling at least one of the dynodes to determine its voltage;
- 10 iii/ switching off the charging means when the sampled dynode voltage reaches a predetermined level or the maximum period of time is reached;
- iv/ waiting for a predetermined period of time.

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawing, wherein

Fig. 1 shows a simplified circuit diagram of the PMT circuit.

- 15 Referring to fig. 1 the PMT circuit comprises a microcontroller, 1; an oscillator circuit, 2, comprising a resistor R1, two capacitors C1 and C2, a transistor TR1 and an inductor L1; charging circuitry in the form of a Cockcroft Walton arrangement, 3, comprising nine diodes, D1 to D9 and nine capacitors C3 to C11;
- 20 a photomultiplier tube, 4, comprising an anode, dynode stages S1. to S7 and a cathode, and sampling circuitry, 5 comprising resistors R2 and R3 and a comparator.

- On start-up the oscillator, 2, provides a high voltage supply to the charging circuitry, 3, which charges the dynode stages of the
- 25 Photomultiplier tube, 4, until they reach predetermined voltages as determined by the sampling circuitry, 5. In this circuit, only 3 stages of gain are used with dynodes S4 to S7 being connected to the Anode of the photomultiplier tube. When the dynode stages are at the required voltages the sampling circuitry generates a
- 30 'stop' signal which is received by the micro-controller, 1, which switches off the oscillator.

During normal operation the oscillator, 2, is switched on every 100ms by the micro-controller, 1, for a maximum of 10ms. The charging time required is determined by the micro-controller, 1, using the sampling circuitry, 5. When the sampling circuitry, 5, determines the required voltages have been achieved in the photomultiplier tube, 4, it generates a 'stop' signal and the micro-controller, 1, switches the oscillator, 2, off and determines the total 'on' time.

The 'on' time can then be used to determine exposure conditions, for example a short 'on' time, i.e. one less than 7ms, will show normal working conditions, a longer 'on' time, i.e. one between 7ms and 9ms will indicate 'overload conditions' and an 'on' time of the maximum 10ms will indicate 'light leak' conditions. Obviously the times taken to indicate the conditions are dependant on the specific components used and voltages required and can be varied accordingly.

When 'overload' or 'light leak' conditions are detected the micro-controller, 1, can be designed so as to wait for increasingly longer set periods of time before switching on the oscillator, 2, again so as to save power and to protect the photomultiplier tube from damage. The time delays between attempting to charge the dynodes could be progressively doubled after a predetermined number of 'on' times which indicate 'overload' or 'light leak' conditions. For example, if after 256 attempts to charge the dynodes the 'overload' or 'light leak' conditions are indicated, the micro-controller, 1, is programmed to wait 2 seconds before trying again to charge the dynodes. If after 256 further attempts to charge the dynodes the 'overload' or 'light leak' conditions are still indicated the micro-controller, 1, is programmed to wait 4 seconds before trying to charge the dynodes. This cycle can be repeated until the 'overload' or 'light leak' conditions are removed. These 'overload' or 'light leak' conditions can also be indicated to a display (not shown).

CLAIMS

1. A photomultiplier tube circuit comprising a photomultiplier tube having a plurality of dynodes, charging circuitry for providing charge to the plurality of dynodes and an oscillator for providing a high voltage supply to the charging circuitry
5 characterised in that the photomultiplier tube circuit further comprises means for sampling the voltage of at least one of the dynodes and switching means for switching the oscillator on and off with respect to the at least one dynode voltage sampled.
- 10 2. A photomultiplier tube circuit according to claim 1 wherein the switching means comprises a micro-controller.
3. A photomultiplier tube circuit according to claim 1 or 2 wherein the switching means is configured so as to determine the length of time that the oscillator is switched on.
- 15 4. A photomultiplier tube circuit according to claim 3 wherein the exposure conditions of the photomultiplier tube can be determined from the length of time that the oscillator is switched on.
5. A photomultiplier tube circuit according to any of the
20 preceding claims wherein the charging circuitry is in the form of a Cockcroft Walton circuit.
6. A photomultiplier tube circuit according to any of the preceding wherein the oscillator is switched on for a set period of time at predetermined intervals and is switched off when the
25 dynode voltage sampled reaches a predetermined voltage.
7. A radiation monitor comprising a photomultiplier tube circuit according to any of the preceding claims.
8. A method of controlling the charging of a photomultiplier tube having a plurality of dynodes using a charging means comprising
30 the cycle of:

charging the dynodes to a predetermined voltage;

switching off the charging means;

sampling at least one of the dynodes to determine its voltage;

switching on the charging means when the sampled dynode voltage drops below a predetermined voltage.

- 5 9. A method of controlling the charging of a photomultiplier tube having a plurality of dynodes using a charging means comprising the cycle of:

switching on the charging means for a predetermined maximum period of time;

- 10 during the predetermined maximum period of time sampling at least one of the dynodes to determine its voltage;

switching off the charging means when the sampled dynode voltage reaches a predetermined level or the maximum period of time is reached;


- 15 waiting for a predetermined period of time.

10. A photomultiplier tube circuit substantially as hereinbefore described with reference to figure 1.

ABSTRACTImproved Photomultiplier Tube Circuit

A photomultiplier tube circuit with reduced power consumption
5 comprising a photomultiplier tube having a plurality of dynodes,
charging circuitry for providing charge to the plurality of
dynodes and an oscillator for providing a high voltage supply to
the charging circuitry characterised in that the photomultiplier
tube circuit further comprise means for sampling the voltage of at
10 least one of the dynodes and a switching means for switching the
oscillator on and off with respect to the at least one dynode
voltage sampled.

FIGURE 1.

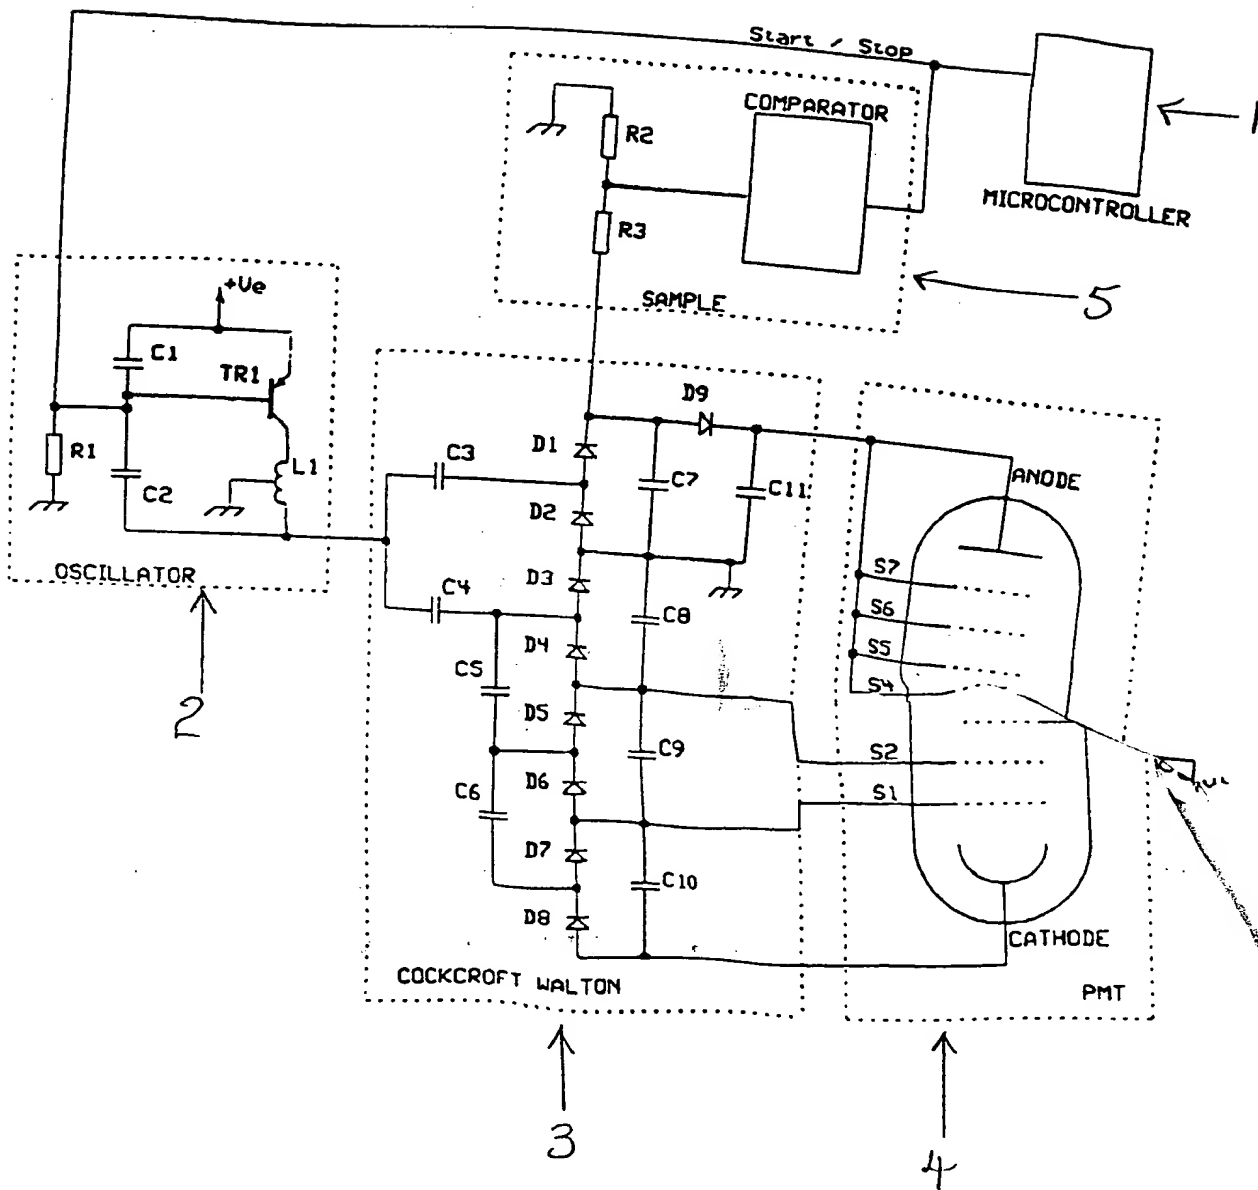

THIS PAGE BLANK (USPTO)